



PLAN



WEAKENED PLANE JOINT

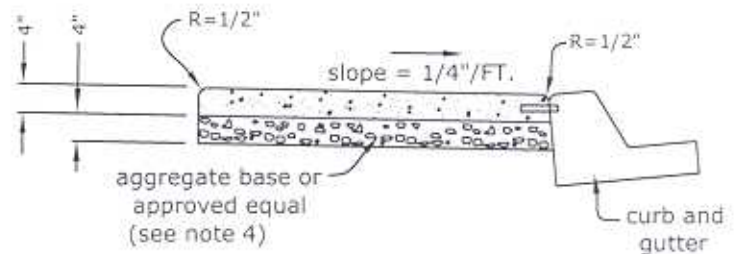

SECTION A-A

Notes:

1. Weakened plan joints shall be constructed at ends of curb returns, curb inlets, other structures and at 12' intervals except in driveway sections. Joints shall match adjacent improvements.
2. Concrete shall be class 'A' or an approved 3000psi mix with a light broom finish.
3. Score lines shall be 1/4" deep.
4. Aggregate base shall be 8" thick where constructing next to existing sidewalk or curbs without dowels.
5. Meandering sidewalk shall be within PSUE as shown on plans.
- △ 6. Industrial sidewalk shall be constructed on both sides of the street.

CITY OF MILPITAS, ENGINEERING DIVISION				STANDARD DRAWING	
REVISION	DATE	DESIGNED: MK	INDUSTRIAL SIDEWALK	NO. 425	
1		DRAWN: TS		ORIGINAL: 1/21/75	
		CHECKED: JK		DATE	
		1 APPROVED BY: <i>David M. McTig</i>	CITY ENGINEER	SHEET 1 OF 1	
			DATE: 10/23/01		